


Threaded Ball Spring Plungers

309

POSITIONING & MACHINE ELEMENTS

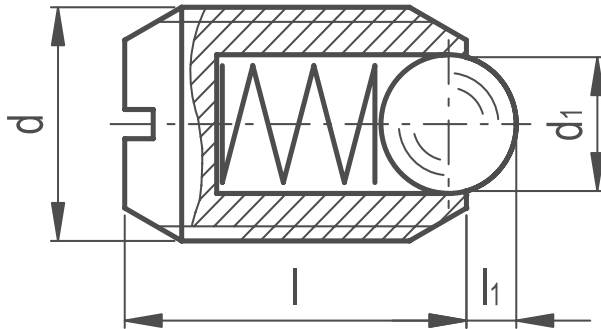

THREADED BODY

- / Acetal resin based (POM) technopolymer, screwdriver slotted head.
- / Resistant to solvents, oils, greases and other chemical agents.

BALL AND SPRING

- / Execution S: hardened stainless steel ball, stainless steel spring.
- / SPBP: technopolymer ball, stainless steel spring.

WORKING TEMPERATURE

- / From -30°C to +50°C.



Part Reference	d	d1	l	l1	Initial	Max
SPBPS1	M6	3.5	14	1	12	17
SPBPS2	M8	5	16	1.5	20	35
SPBPS3	M10	6	19	2	25	45
SPBP1	M6	3.5	14	1	12	17
SPBP2	M8	5	16	1.5	20	35
SPBP3	M10	6	19	2	25	45