


Smooth Ball Spring Plungers

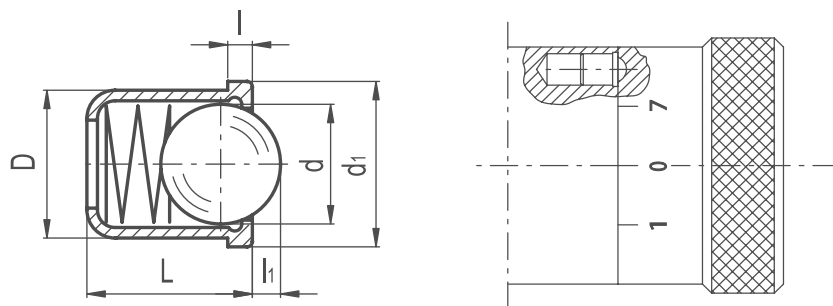

BODY

- / Acetal resin based (POM) technopolymer.
- / Resistant to solvents, oils, greases and other chemical agents.

BALL AND SPRING

- / SBSB: hardened stainless steel ball, stainless steel spring.
- / P: technopolymer ball, stainless steel spring.

WORKING TEMPERATURE

- / From -30°C to +50°C.

ACCESSORIES

Holders for spring plungers type HSBP to optimise the use of smooth ball spring plungers.



Part Reference	D+/-0.1	L	d	d1	l+/-0.1	l1	Initial	Max
SBSB1	4	5	3	4.6	1	0.8	2.5	6.5
SBSB2	5	6	4	5.6	1	1	4.5	9
SBSB3	6	7	5	6.5	1	1.6	6.5	13
SBSB4	8	9	6.5	8.5	1	1.9	8	18
SBSB5	10	13.5	8.5	11	1.5	2.4	12	23
SBSB6	12	16	10	13	1.5	3.3	13	25
SBSBP7	4	5	3	4.6	1	0.8	2.5	6.5
SBSBP8	5	6	4	5.6	1	1	4.5	9
SBSBP9	6	7	5	6.5	1	1.6	6.5	13
SBSBP10	8	9	6.5	8.5	1	1.9	8	18