


Pre-packed Shim Stock

260 Half Hard Brass

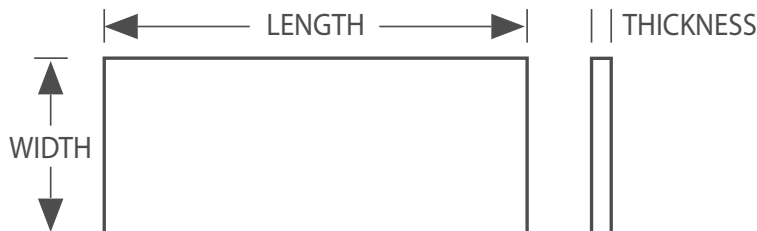

FEATURES

- / Half Hard
- / Rockwell 30T56 - 68
- / 6" and 12" Widths

ORDERING INSTRUCTIONS

Identify thickness, width and length required from the tables below or identify part number. Other sizes can be cut to custom size.



APPLICATIONS

260 (C26000) Brass has the highest formability of all yellow brasses. 260 Brass has high electrical and heat conductivity, as well as, significant corrosion resistance. These attributes make 260 Brass ideal for electronic, heating and plumbing components, shims, washers and fasteners. Brass is an attractive alloy, and as such, is perfect for decorative applications.

6" x 100" 260 Brass Rolled Shim Stock

Part Reference	Thickness		Width (inch)	Length (Inch)	Kg
	Inch	Metric			
SHBRS-1	0.001	0.025	6"	100"	0.086
SHBRS-1X	0.0015	0.038	6"	100"	0.127
SHBRS-2	0.002	0.051	6"	100"	0.168
SHBRS-3	0.003	0.076	6"	100"	0.249
SHBRS-4	0.004	0.102	6"	100"	0.336
SHBRS-5	0.005	0.127	6"	100"	0.422
SHBRS-6	0.006	0.152	6"	100"	0.503
SHBRS-7	0.007	0.178	6"	100"	0.590
SHBRS-8	0.008	0.203	6"	100"	0.671
SHBRS-9	0.009	0.229	6"	100"	0.753
SHBRS-10	0.010	0.254	6"	100"	0.839
SHBRS-12	0.012	0.305	6"	100"	1.007
SHBRS-15	0.015	0.381	6"	100"	1.256
SHBRS-20	0.020	0.508	6"	100"	1.678
SHBRS-25	0.025	0.635	6"	100"	2.096
SHBRS-31	0.031	0.787	6"	100"	2.599

Continued on next page

12" x 120" 260 Brass Rolled Shim Stock

Part Reference	Thickness		Width (inch)	Length (Inch)	Kg
	Inch	Metric			
SHBRW-1	0.001	0.025	12"	120"	0.204
SHBRW-2	0.002	0.051	12"	120"	0.404
SHBRW-3	0.003	0.076	12"	120"	0.603
SHBRW-4	0.004	0.102	12"	120"	0.807
SHBRW-5	0.005	0.127	12"	120"	1.007
SHBRW-6	0.006	0.152	12"	120"	1.207
SHBRW-8	0.008	0.203	12"	120"	1.610
SHBRW-10	0.010	0.254	12"	120"	2.014
SHBRW-12	0.012	0.305	12"	120"	2.413
SHBRW-15	0.015	0.381	12"	120"	3.016
SHBRW-20	0.020	0.508	12"	120"	4.023
SHBRW-25	0.025	0.635	12"	120"	5.030
SHBRW-31	0.031	0.787	12"	120"	6.237