


# Pre-packed Shim Stock

## C110 Annealed Copper

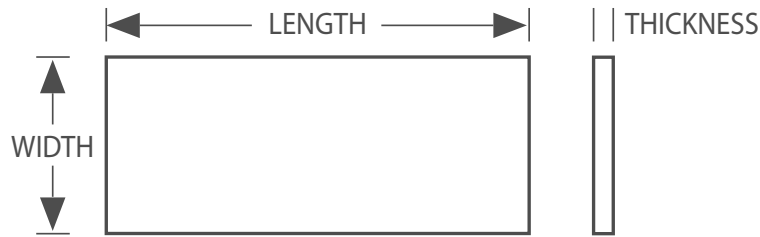

### FEATURES

- / Annealed
- / 99.9% Copper
- / Rockwell 15T47-57
- / 6" Widths

### ORDERING INSTRUCTIONS

Identify thickness, width and length required from the tables below or identify part number. Other sizes can be cut to custom size.



### APPLICATIONS

C110 Copper has high electrical and heat conductivity. Copper is extremely malleable with good cold working properties. Due to its outstanding heat conductivity and malleability, Copper is ideal for gaskets, washer's, heat exchanger components and shims. Copper's attributes also make it an ideal choice for electrical components.

## 6" x 50" C110 Copper Rolled Shim Stock

Part Reference	Thickness		Width (inch)	Length (Inch)	Kg
	Inch	Metric			
SHCUX-1	0.001	0.025mm	6"	50"	0.045
SHCUX-2	0.002	0.051mm	6"	50"	0.086
SHCUX-3	0.003	0.076mm	6"	50"	0.132
SHCUX-4	0.004	0.102mm	6"	50"	0.168
SHCUX-5	0.005	0.127mm	6"	50"	0.209
SHCUX-6	0.006	0.152mm	6"	50"	0.254
SHCUX-7	0.007	0.178mm	6"	50"	0.295
SHCUX-8	0.008	0.203mm	6"	50"	0.336
SHCUX-10	0.010	0.254mm	6"	50"	0.422
SHCUX-15	0.015	0.381mm	6"	50"	0.630
SHCUX-20	0.020	0.508mm	6"	50"	0.830
SHCUX-25	0.025	0.635mm	6"	50"	1.048
SHCUX-32	0.032	0.813mm	6"	50"	1.343

Continued on next page

**6" x 100" C110 Copper Rolled Shim Stock**

Part Reference	Thickness		Width (inch)	Length (Inch)	Kg
	Inch	Metric			
SHCU-1	0.001	0.025mm	6"	100"	0.086
SHCU-2	0.002	0.051mm	6"	100"	0.172
SHCU-3	0.003	0.076mm	6"	100"	0.259
SHCU-4	0.004	0.102mm	6"	100"	0.336
SHCU-5	0.005	0.127mm	6"	100"	0.417
SHCU-6	0.006	0.152mm	6"	100"	0.503
SHCU-7	0.007	0.178mm	6"	100"	0.585
SHCU-8	0.008	0.203mm	6"	100"	0.671
SHCU-10	0.010	0.254mm	6"	100"	0.839
SHCU-15	0.015	0.381mm	6"	100"	1.256
SHCU-20	0.020	0.508mm	6"	100"	1.660
SHCU-25	0.025	0.635mm	6"	100"	2.096
SHCU-32	0.032	0.813mm	6"	100"	2.681