


Dowel Pin

DIN 6325

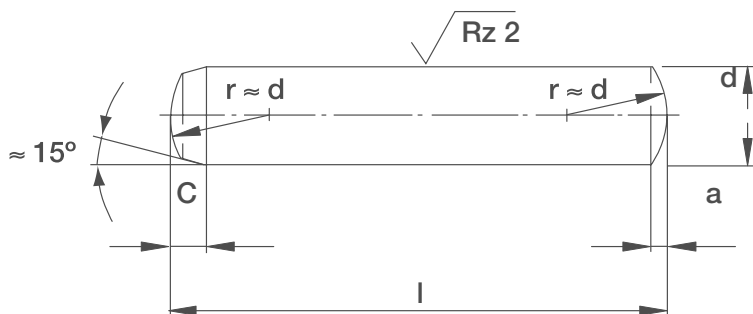

HUGE STOCKS

VOLUME DISCOUNT

- / Fully hardened and tempered, fine ground finished to m6, turned tip and edge.
- / Hardness: 60 ± 2 HRC

ORDERING INSTRUCTIONS

/ State: Diameter and Length



d	m6	1	1.5	2	2.5	3	4	5	6	8	10	12	16	20
a	≈	0.12	0.20	0.25	0.3	0.4	0.5	0.63	0.8	1	1.2	1.6	2	2.5
c		0.5	0.6	0.8	1	1.2	1.4	1.7	2.1	2.6	3	3.8	4.6	6
r1	min	-	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.5	0.6	0.6	0.8	0.8
	max	-	0.6	0.6	0.7	0.8	0.9	1	1.1	1.3	1.4	1.6	1.8	2
Nominal Value	I	min	max											
4	3.75	4.25												
5	4.75	5.25												
6	5.75	6.25												
8	7.75	8.25												
10	9.75	10.25												
12	11.50	12.50												
14	13.50	14.50												
16	15.50	16.50												
18	17.50	18.50												
20	19.50	20.50												
24	23.50	24.50												
28	27.50	28.50												
32	31.50	32.50												
35	34.50	35.50												
40	39.50	40.50												
45	44.50	45.50												
50	49.50	50.50												
55	54.25	55.75												
60	59.25	60.75												
70	69.25	70.75												
80	79.25	80.75												
90	89.25	90.75												
100	99.25	100.75												
120	119.25	120.75												