


Dowel Pins Tapped – Metric

BS 8735 / ISO 8735 Limits, Types A and B

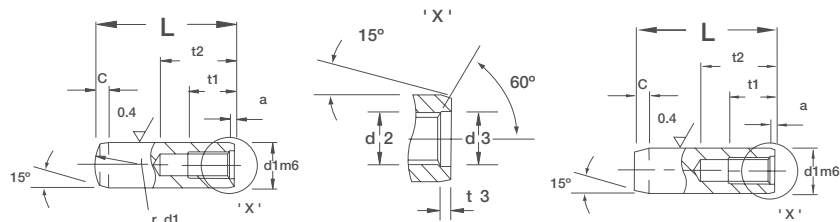

Our stock is based on Type B Pins

d1	6	8	10	12	16	20	25	30	40	50
d= m6 Limits	+0.04 +0.012	+0.06 +0.015	+0.06 +0.015	+0.07 +0.018	+0.07 +0.018	+0.08 +0.021	+0.08 +0.021			
a ≈	0.8	1	1.2	1.6	2	2.5	3	4	5	6.3
c	2.1	2.6	3	3.8	4.6	6	6	7	8	10
d2	M3*	M4*	M6	M6	M8	M10	M16	M20	M20	M24
d3	4.3	5.3	6.4	6.4	8.4	10.5	17	21	21	25
t1	6	8	10	12	16	18	24	30	30	36
t2 min.	10	12	16	20	25	28	35	40	40	50
t3	1	1.2	1.2	1.2	1.5	1.5	2	2	2.5	2.5
L										
nom.	min.	max.								
16	15.5	16.5								
18	17.5	18.5								
20	19.5	20.5								
22	21.5	22.5								
24	23.5	24.5								
25	24.5	25.5								
28	27.5	28.5								
30	29.5	30.5								
32	31.5	32.5								
35	34.5	35.5								
40	39.5	40.5								
45	44.5	45.5								
50	49.5	50.5								
55	54.25	55.75								
60	59.25	60.75								
65	64.25	65.75								
70	69.25	70.75								
75	74.25	75.75								
80	79.25	80.75								
85	84.25	85.75								
90	89.25	90.75								
95	94.25	95.75								
100	99.25	100.75								
120	119.25	120.75								
140	139.25	140.75								
160	159.25	160.75								
180	179.25	180.75								
200	199.25	200.75								

**HUGE
STOCKS**

**VOLUME
DISCOUNT**

/ d2* to prevent cracking B&T supply 6mm and 8mm pins with smaller tapped hole size than the BS/ISO standard.

/ Tapped Dowel Pin Extractors available – state thread size. Dowel Pins can be supplied with air release flat at extra cost.