


Knurled Thumb Screw

DIN 464

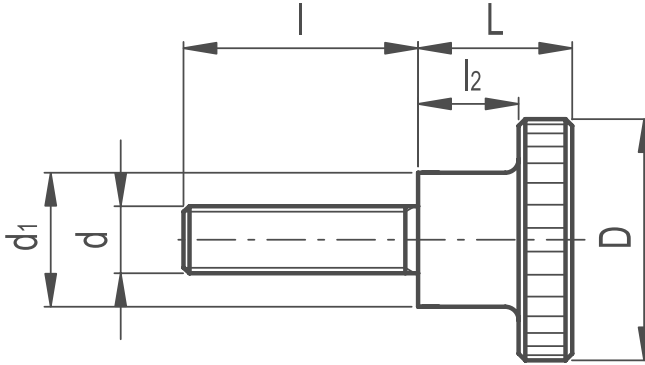

329

POSITIONING & MACHINE ELEMENTS

- / **Material**
Turned black-oxide steel.
- / **Assembly**
Threaded pin.

Special executions on request
(For sufficient quantities)
Different lengths and threadings.

- / **Material**
AISI 303 stainless steel, sandblasted matte finish.
- / **Assembly**
Threaded pin.

SPECIAL EXECUTIONS ON REQUEST
(For sufficient quantities)
Different lengths and threads.

- / **Material**
Brass-bright finish.
- / **Assembly**
Threaded pin.

SPECIAL EXECUTIONS ON REQUEST
(For sufficient quantities)
Different lengths and threads.

FEATURES AND APPLICATIONS
AISI 303 stainless steel, thanks to its high resistance to corrosion, allows the application of these knobs on machines and equipment in those sectors where laws or particular hygienic, climatic and environmental factors make it mandatory to use corrosion resistant materials.



Knurled Thumb Screw DIN 464 Brass

Part Reference	d	l	D	L	d1	l2
KTS1BR	M5	10	20	11.5	10	7.5
KTS2BR	M5	16	20	11.5	10	7.5
KTS3BR	M6	16	24	15	12	10
KTS4BR	M6	20	24	15	12	10
KTS5BR	M8	16	30	18	16	12
KTS6BR	M8	20	30	18	16	12
KTS7BR	M8	30	30	18	16	12

Knurled Thumb Screw

Knurled Thumb Screw DIN 464

Part Reference	d	l	D	L	d1	l2
KTS1-3714	M3	6	12	7.5	6	5
KTS2-3714	M3	10	12	7.5	6	5
KTS3-3714	M3	12	12	7.5	6	5
KTS4-3714	M3	16	12	7.5	6	5
KTS5-3714	M4	8	16	9.5	8	6
KTS6-3714	M4	10	16	9.5	8	6
KTS7-3714	M4	12	16	9.5	8	6
KTS8-3714	M4	16	16	9.5	8	6
KTS9-3714	M4	20	16	9.5	8	6
KTS10-3714	M4	25	16	9.5	8	6
KTS11-3714	M5	6	20	11.5	10	7.5
KTS12-3714	M5	8	20	11.5	10	7.5
KTS13-3714	M5	10	20	11.5	10	7.5
KTS14-3714	M5	12	20	11.5	10	7.5
KTS15-3714	M5	16	20	11.5	10	7.5
KTS16-3714	M5	20	20	11.5	10	7.5
KTS17-3714	M5	25	20	11.5	10	7.5
KTS18-3714	M5	30	20	11.5	10	7.5
KTS19-3714	M6	8	24	15	12	10
KTS20-3714	M6	10	24	15	12	10
KTS21-3714	M6	12	24	15	12	10
KTS22-3714	M6	16	24	15	12	10
KTS23-3714	M6	20	24	15	12	10
KTS24-3714	M6	25	24	15	12	10
KTS25-3714	M6	30	24	15	12	10
KTS26-3714	M8	12	30	18	16	12
KTS27-3714	M8	16	30	18	16	12
KTS28-3714	M8	20	30	18	16	12
KTS29-3714	M8	25	30	18	16	12
KTS30-3714	M8	30	30	18	16	12
KTS31-3714	M8	35	30	18	16	12
KTS32-3714	M8	40	30	18	16	12
KTS33-3714	M10	20	36	23	20	15
KTS34-3714	M10	25	36	23	20	15
KTS35-3714	M10	30	36	23	20	15
KTS36-3714	M10	35	36	23	20	15
KTS37-3714	M10	40	36	23	20	15

Knurled Thumb Screw DIN 464-303 Stainless Steel

Part Reference	d	l	D	L	d1	l2
KTS1SS	M5	10	20	11.5	10	7.5
KTS2SS	M5	16	20	11.5	10	7.5
KTS3SS	M6	16	24	15	12	10
KTS4SS	M6	20	24	15	12	10
KTS5SS	M8	16	30	18	16	12
KTS6SS	M8	20	30	18	16	12
KTS7SS	M8	30	30	18	16	12